Load Safety Gate

One photo at the gate. GO or NO-GO before the truck leaves.

Mode: Startup · Track: Computer Vision · Team Destroyerrrrs

GO WARN NO-GO

Body roll · Overhang · Height · Plates and people blurred before anything is shown

A badly loaded truck is checked by eye, or not at all

Who uses it

Gate operator or dispatcher at a terminal, fleet depot or dealer receiving yard. One photo, one answer, before the truck leaves.

What goes wrong today


One-sided loads roll over. Overhanging cargo hits bridges and other vehicles. Oversized loads draw fines and stop the truck at the first police post.

Who pays

Fleet owner or terminal, per gate. Every Toyota and BYD arrives on a car carrier into a Royal Motors yard, and car carriers are the classic over-height and rear-overhang offenders.

Regulation already exists

Uzbekistan Decree 342, Annex 2: height 4.0 m, width 2.55 m, rear protrusion 2 m. Nobody measures it at the gate.

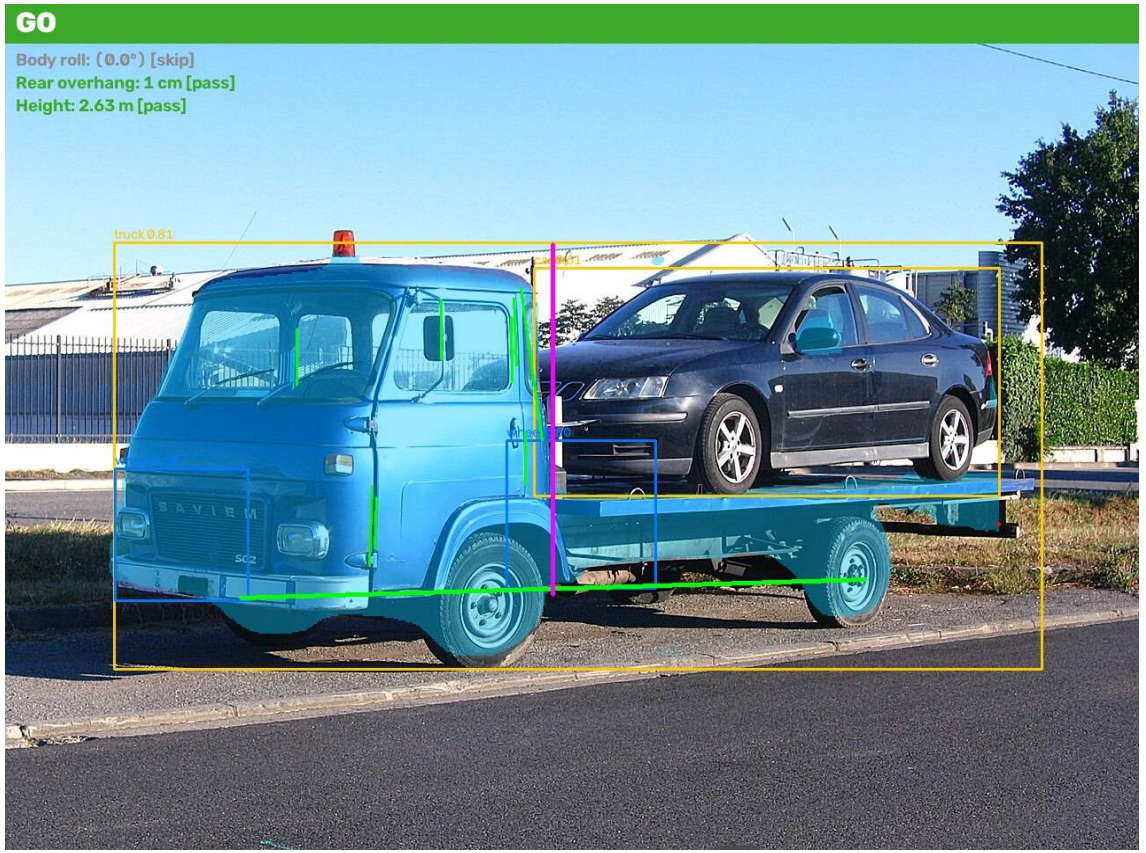

Live output of the deployed pipeline on a licensed test image (Wikimedia Commons, CC BY-SA 4.0).

Live demo

amir-kuldashev--load-safety-gate-web.modal.run

Open it on your phone. Take a photo of any truck, or give us one. No login, no app.

- Plates and people are pixelated first. The original is never stored.
- Green lines: body vertical edges and the ground line the roll is measured against.
- Red line: cargo beyond the body edge, in centimetres. Magenta: cargo top to ground, in metres.
- Verdict banner, per-check confidence, and the measured latency on CPU.
- Every run gets an inspection ticket and lands in the shift journal: counts of GO, WARN, NO-GO for the day. Numbers only, the photo is discarded.
- When the photo does not allow a measurement the check says so. No guess, ever.



A pipeline, not a prompt

1

Photo

phone or gate camera

2

Detect

YOLO-World boxes: truck, trailer, cargo, car, plate, person. YOLOv8-seg truck mask. Pretrained, no training.

3

Blur

plates and people pixelated before storage or display

4

Measure

wheel finder, ground line, body verticals vs scene verticals, scale from 2.55 m body or 1.05 m wheel

5

Decide

Decree 342 thresholds; GO, WARN, NO-GO, or CANNOT ASSESS

6

Report

annotated image, checklist, confidence, latency


Ours

Privacy stage, wheel finder, geometry, decision rules, the 301-image licensed set, the 120-image labelled evaluation, the app and the deployment.

Borrowed, with attribution


Two pretrained Ultralytics models (AGPL-3.0). Open-vocabulary prompts, no fine-tuning needed for the demo. Runs on CPU in 0.19 s per image.

Measured relative to the truck itself, so a phone photo is honest

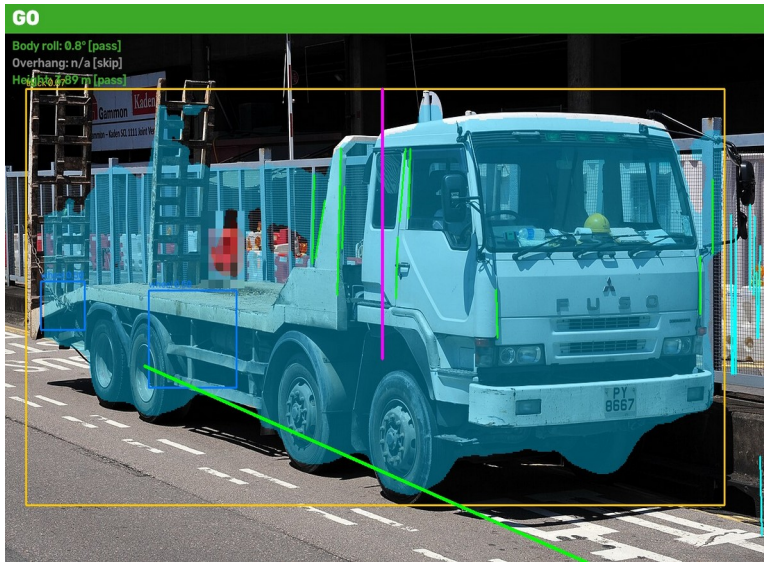

Body roll

Green: the body's vertical edges. Cyan: vertical lines in the scene. The angle between them is the roll, so a tilted phone does not tilt the truck.

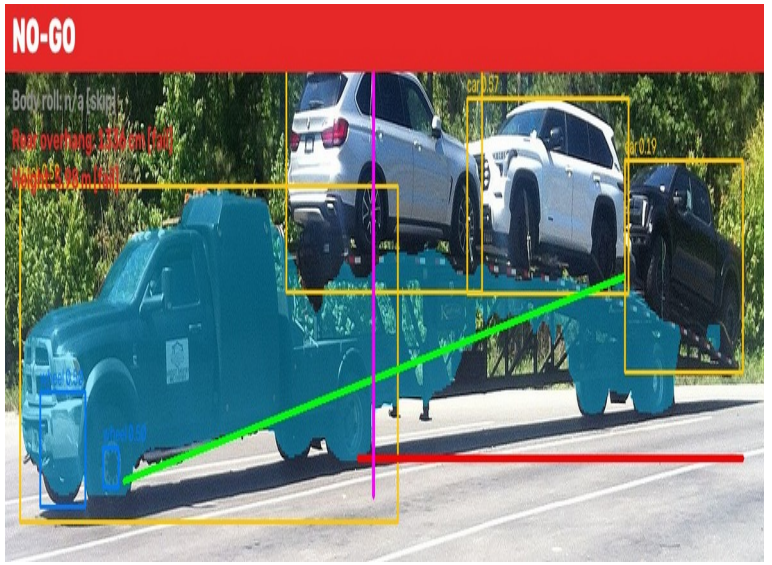

Overhang

Red: cargo beyond the body edge, converted to centimetres with the 1.05 m wheel or the 2.55 m body width in the same photo.



Height

Magenta: cargo top to the ground line through the tyres, in metres, against the 4.0 m limit.

Every number is relative to an object in the same photo. No camera calibration, no absolute pose. When the photo has no usable reference the check says CANNOT ASSESS.

Photos: Wikimedia Commons, Ralf Roletschek (CC BY 3.0); Bull-Doser (Public domain); Bob Adams from George, South Africa (CC BY-SA 2.0). Annotations drawn by the pipeline.

Measured on a test set we built, including the bad news

Subset	Images	Truck found	Wheels	Scale	Roll reported
Car carriers	70	0.89	0.60	0.71	0.21
Flatbeds	55	0.87	0.71	0.76	0.27
Semi-trailers	30	0.97	0.70	0.83	0.37
Oversized loads	44	0.86	0.50	0.59	0.11
Night	38	0.97	0.66	0.74	0.45

Detector hit rate on 301 licensed Commons photos (no labels needed). Night holds up: the truck mask is the most robust stage.

Check	Precision	Recall	tp/fp/fn
Tilted body	0.40	0.18	2/3/9
Rear overhang	0.00	0.00	0/1/7
Side overhang	n/a	0.00	0/0/6
Over height	0.57	0.24	4/3/13
Clean trucks, no false alarm	39 of 44		89% specificity

Against 101 team-labelled images, 61 of them three-quarter views. Honest result: the phone mode is conservative. 89% of clean trucks pass without a false alarm, but it caught only 6 of 41 labelled positives, mostly three-quarter views where no scale object is visible. The calibrated gate camera is the fix, not a bigger model.

1.63°

roll instrument error, 56 rotated level photos at known angles, sign right 93% of the time

0.19 s

per image on 2 CPU cores, measured on the deployed server

< $0.001

compute per inspection; one warm server about $90 per month


0 faces

stored. Plates and people pixelated before anything is kept


Where it breaks, and what it does instead of guessing



Not a truck, or a tiny truck in the frame. Result: CANNOT ASSESS. The overloaded-vehicles category on Commons is mostly carts and motorbikes.

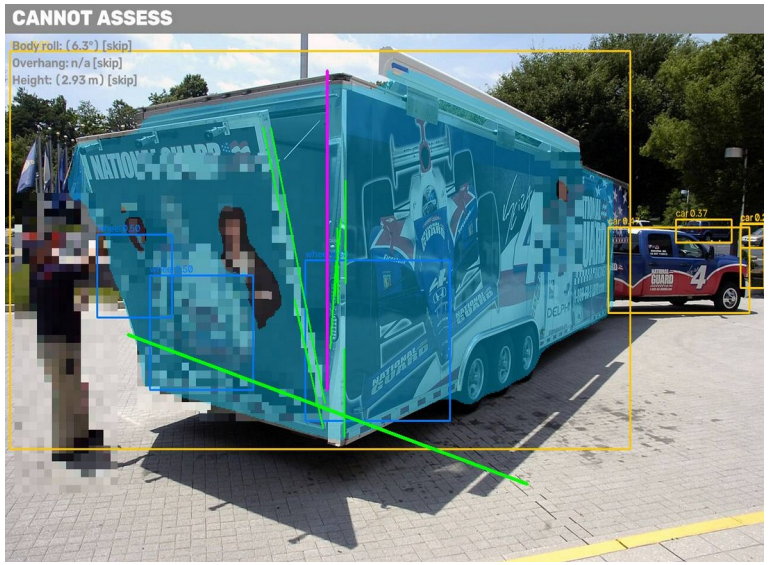

Front or three-quarter views foreshorten the body. Roll confidence drops below the floor and the check is skipped.

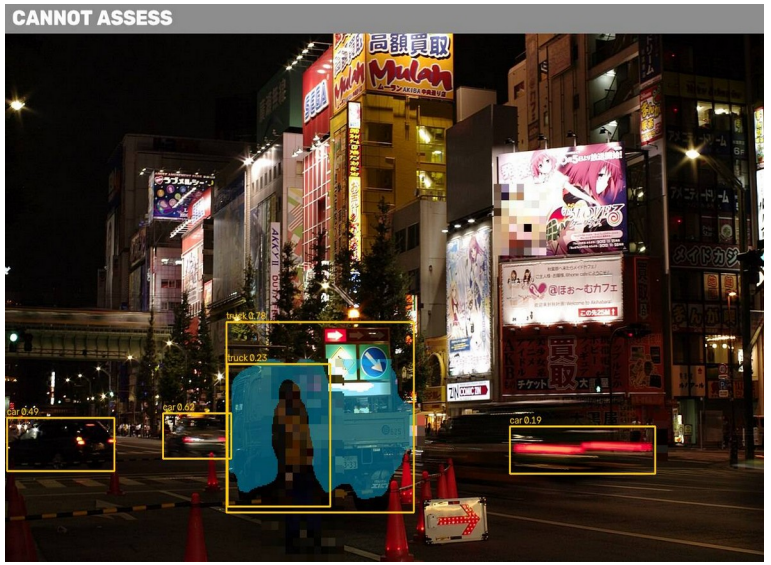

Night street with no truck in frame: CANNOT ASSESS. Wheels hidden in shadow or behind tanks give a wrong scale; a height that comes out above 8 m is shown as unreliable, never reported as a measurement.

Design rule

Every check reports a confidence and is skipped below a floor. A skipped check is shown as such, never as a pass.

The replication test

A weekend with the same tools gets you

- A detector that draws boxes around trucks and cargo
- A prompt to a vision model that says "looks overloaded"
- No measurement, no threshold, no number a gate operator can act on

What they do not get

- Perspective-safe roll from vertical edges, with a gravity reference in the same image
- Centimetres and metres from a known object in the frame, and a CANNOT ASSESS path
- A decision layer written from Decree 342, the regulation a police post actually applies
- A privacy stage that makes the product legal to pilot
- 301 licensed images with hit rates, 120 labelled, and a deployed gate product

Pilot budget and payback, every assumption on the slide

Pilot cost, 3 months	Amount	Assumption
Team: 3 people, 3 months	$7,200	$800 per person per month
Cameras and mounts, 3 gates	$600	$200 per gate, one-off
Hosting	$270	one warm CPU server, $90 per month
Labelling and data	$500	about 40 hours of labelling
Legal and privacy review	in team time	blur at ingest, no personal data stored, one-day legal check

Avoided loss, one fleet	Amount	Assumption, calibrated in the pilot
Departures screened	200 per day	mid-size fleet, one gate camera
Dangerous departures caught	1 per month	conservative: 1 in ~6,000 departures
Cost of one load incident	$5,000	cargo loss + downtime + fine + claim handling; wide range
Avoided loss per year	$60,000	12 incidents x $5,000

Unit economics

Price per gate per month, software only. Compute per inspection is below $0.001, so margin is in the subscription, not the inference. One server serves dozens of gates.

Payback

Pilot cost $8,570 (team $7,200 + cameras $600 + hosting $270 + labelling $500). Avoided loss $5,000 per month at one caught incident a month. Payback = 8,570 / 5,000 = 1.7 months, inside the pilot itself. The fleet's own incident rate replaces the assumption after month one.

Next steps

Month 1

Fixed, calibrated camera at one gate. Reference marker removes scale ambiguity. Ten-second video mode.

Month 2

Fine-tune the detector on our labelled set. Add open door, loose strap and missing marking classes.

Month 3

Weighbridge and dispatch integration. Pilot at a Royal Motors receiving yard on incoming car carriers.

Repository: github.com/Winner-121/Destroyerrrrs_Final_Stage · Demo: amir-kuldashev--load-safety-gate-web.modal.run


Questions?

Open the gate on your phone right now:

`amir-kuldashev--load-safety-gate-web.modal.run`

`github.com/Winner-121/Destroyerrrrs_Final_Stage`

GO **WARN** **NO-GO**

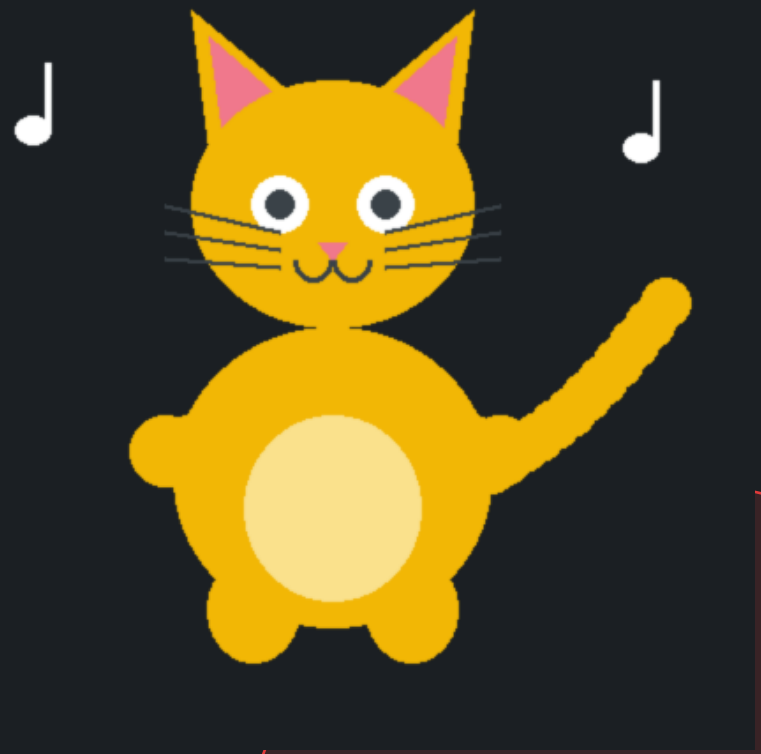

Team Destroyerrrrs, thank you